

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 August 2009 (13.08.2009)

(10) International Publication Number  
**WO 2009/099334 A1**


- (51) International Patent Classification:  
*F16C 32/06* (2006.01)     *F04D 29/04* (2006.01)
- (21) International Application Number:  
PCT/NO2009/000034
- (22) International Filing Date:  
29 January 2009 (29.01.2009)
- (25) Filing Language:  
Norwegian
- (26) Publication Language:  
English
- (30) Priority Data:  
20080700     7 February 2008 (07.02.2008)     NO
- (71) Applicant (for all designated States except US): **STA-TOILHYDRO ASA** [NO/NO]; N-4035 Stavanger (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **UNDERBAKKE, Harald** [NO/NO]; Alveveien 18, N-4314 Sandnes (NO).
- (74) Agent: **ZACCO NORWAY AS**; P.O. Box 2003, Vika, N-0125 Oslo (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report (Art. 21(3))

(54) Title: BEARING SYSTEM FOR ROTOR IN ROTATING MACHINES

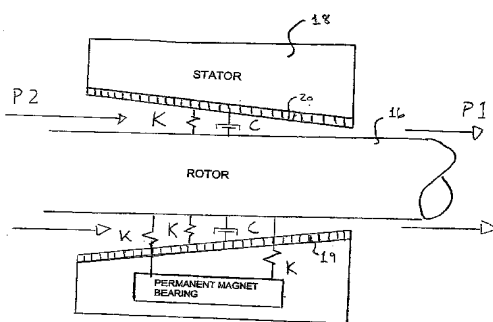

(57) Abstract: A bearing system for a rotor in rotating machines, such as compressors, pumps, turbines, expanders, is characterized in that points of bearing and sealing for the rotor (16) each being in the form of a combined bearing and sealing (17) formed by a stator (18) situated within a rotating machine house and surrounding the rotor (16). The stator (18) is formed with a bore (19), whereby an annular clearance is created between stator and rotor, and the bore (19) is having sectional area gradually increasing in the direction of larger pressure (P2) within the rotating machine.

$P2 > P1$

K: positive direct rigidity

C: positive direct damping

Fig. 2



WO 2009/099334 A1

## BEARING SYSTEM FOR ROTOR IN ROTATING MACHINES

The present invention relates to a bearing system for a rotor in rotating machines, as specified in the preamble of patent claim 1.

5

In existing rotating machines, the rotor is supported both axially and radially. This may be done using bearings which are lubricated, magnetic, gas-dynamic etc. A common feature of all these bearings is that the length of the rotor shaft increases. Complex and costly support systems are also a necessity, except in the case of gas-dynamic bearings.

10 Gas-dynamic bearings of the foil type do not require such support systems, but their bearing strength is for the present far less than that required for rotating machines with high output or pressure.

Other hydrodynamic and hydrostatic gas bearings have been proposed and to some extent tested but have not achieved significant popularity. Typical for hydrodynamic bearings, for example a foil bearing, is that their rotation generates a lift which gives bearing strength. In hydrostatic bearings, external pressurisation is carried out using specially formed recesses in the bearings. This bearing type requires separate seals.

20 Some examples of such bearings are disclosed by EP-A1 1607633, 1619355, US-A 5827042 and WO-A1 97/13084.

Amongst these, EP-A1 1607633 describes a vacuum pump having two screw rotors which are supported by a pair of bearings installed on a pair of shafts. The invention is distinguished by a pair of shaft seals not being in contact with the pair of shafts are mounted between the screw rotors and pair of bearings.

30 EP-A1 1619355 relates to a steam turbine rotor which is rotatably supported in the longitudinal direction. In this instance, turbine components provide for chambers being formed around the rotor and are exposed to an inner and outer pressure which are different. The turbine has at least one water-powered shaft bearing component to accommodate the rotor, whereby this component along with the turbine component are sealed one after the another in the longitudinal direction.

35 US-A 5827042 shows a stuffing box for a centrifugal pump, where a spiral groove is cut on the outer surface of a pair tapered bearing surfaces for the rotor. Barrier-liquid is feed

to an entry-mouth in the spiral groove, and the groove generates a pressure in the spiral groove which is high enough to overcome the process pressure.

At last, WO-A1 97/13084 discloses an impeller pump, in which the sealing and bearing unit has two rotor-stator pairs of tapered sleeves having a spiral groove which conveys barrier-liquid from an entry-mouth in an entry-chamber to an exit-mouth in an exit-chamber, providing the unit with mechanical stability, trust support capability, and resistance to vibrations in the unit.

10 This means that the existing technology provides solutions which are costly, complex, bulky and not particularly reliable.

The main object of the present invention is therefore to provide an improved bearing system for the rotor in rotating machines, with combined bearing and sealing of the rotor.

This object is achieved by the bearing system disclosed in patent claim 1. Preferred embodiments of the invention will be understood from the dependent claims and the following description of preferred embodiments.

20

Among the advantages of such a combined bearing system are that the design may be compact, allowing the rotor to be made shorter and more rigid for enhanced rotor-dynamic performance, or alternatively shorter and thinner for weight reduction, that the sealing aspect has much less importance than before, and that the costs are cut substantially as a result of the reliability or even the practicability of using the rotating machine in a subsea environment. The actual working medium in the machine may also be used during operation of the system so as to further reduce the complexity compared with known solutions.

30 By forming the bearing and seal combination according to the invention of an axial bearing in the form of a cylindrical disc on the rotor which rests against an associated portion of the stator, a gas film can be formed with rigidity and damping corresponding to the same principle as in a radial bearing with desired dynamic rigidity and damping. Alternatively, the axial bearing can be formed corresponding to the hydrostatic principle, which involves a flow restriction before and after the bearing surface, so as to obtain rigidity with accompanying damping. The axial bearing can also be formed using a combination of the two principles.

35

The present invention will now be discussed in more detail with the aid of preferred illustrative embodiments shown in the drawings, in which:

5 Figs. 1A and 1B show schematically the difference between a traditional rotating machine in the form of a compressor with motor-powered rotor, and the corresponding formed in accordance with the invention;

Fig. 2 shows in a schematic sectional view the basic structure of a component having  
10 combined bearing and seal which is included in the present bearing system;

Fig. 3 shows schematically an embodiment with several of the components from Fig. 2 and a start-up/run-down accumulator;

15 Fig. 4 shows further schematic another embodiment with the possibility of altering the clearance geometry of the bearing system, respectively internal pressure differences in the rotating machine;

Fig. 5 shows schematically the same as Fig. 2, but in this case formed with two sets of  
20 radial hole-patterns for increased damping in the bearing system by means of gas exchange;

Fig. 6 shows schematically an embodiment of the invention with compressor and motor located in the same housing; and

25

Fig. 7A to 7D shows schematically another embodiment of a stator provided with among others guide blades in perspective and section view, respectively, and seen projected into a horizontal plane.

30 With reference to Fig. 1, the present invention shall be explained in more detail in connection with rotating machines, for example such as a compressor for use in subsea environments and which has a motor-powered rotor. However, this must not be understood as meaning that the invention relates solely to the illustrated compressor, as it is of course suitable other rotating machine types and environments of use. Furthermore,  
35 it should be noted that the figures only show details which are important for the understanding of the invention.

As shown in Fig. 1A, the traditional compressor has a motor-powered rotor, equipped with a bearing system 13 and a sealing system 14, respectively, which are placed on a rotor shaft 12 at each end outside a compressor housing 11. As illustrated in Fig. 1B, whereas these external bearing and sealing systems in the case of the present invention are replaced by at least two components 17, of which just one is shown, and which are located inside the compressor housing 15. The new component 17 also functions as a combination of a bearing and seal for the rotor 16, see Fig. 2. This means that the compressor can be equipped with a suitable motor, see Fig. 6, which is arranged inside the compressor housing. Thus, the need for external shaft seals no longer exists, with the result that the rotating machine as such has a far simpler design.

The principle of the combined bearing and seal 17 from Fig. 1B is illustrated in greater detail in Fig. 2. According to the general embodiment of the invention, an approximately cylindrical stator 18, i.e., the stationary part surrounding the rotor 16, is formed with a bore 19, whereby an annular clearance is formed between these. The stator 18 thus constitutes a "bearing point" for the rotor 16. Furthermore, the pressure difference is used, i.e., the pressure drop across the clearance, to obtain the function as combined rotor bearing and seal. In Fig. 2 this is symbolised by means of P2 and P1, that is to say the outlet pressure and the inlet pressure of the compressor, respectively. The precondition for a successful result is, however, that the annular clearance has a geometric configuration that gives sufficient rigidity and damping in the relevant frequency ranges, as symbolised by K and C in Fig. 2. The rigidity can be provided by allowing the annular clearance to converge towards the lower pressure, so that the inlet clearance is greater than the outlet clearance. Positive direct rigidity is thus obtained in the bearing. Positive direct damping may be provided by means of the characteristics of the surface 20 of the stator facing the rotor, e.g., by means of a honeycomb structure or other type of roughness in the surface. The stator 18 is, for example, mounted in a T-shaped groove (not shown) with loose fit in the compressor housing.

Positive direct rigidity is a known concept in the field of rotor dynamics and entails the countering of radial motion of the rotor by the bearing, so that the same holds the rotor centred in the clearance for correct positioning in relation to the stator. Direct positive damping means that the rotor is "braked" or damped by the bearing.

With reference to Fig. 3, an embodiment is illustrated which is an example of the use of the present invention where the bearings/seals 3, 4, 5 are of the type referred to above in connection with Fig. 2. In this case, internal seals 1, 2 are also arranged between each

impeller. The latter can be configured as a converging clearance or other suitable geometry so as to improve the rotor-dynamic properties if found expedient. The internal seals may alternatively only have a function as seals having conventional design.

5 It is clear, furthermore, that the combined seals and bearings require a pressure difference in order to cause the required rigidity and damping. This is a fact that must be taken into account during start-up and shut-down. As shown in Fig. 3, the difference in pressure can be obtained by means of an accumulator 6 which is put in communication with the respective bearing and seal combinations 3, 4, 5 in any suitable way. The ac-  
10 cumulator is filled with gas pressurised to the outlet pressure P2 for injection into the bearing and seal combinations 3, 4, 5. An alternative is the mounting of special start-up and run-down bearings 7 which also additionally are shown in Fig. 3, for example, bearings of the same type as used in magnetic bearings, and which withstand contact for a brief period during start-up or run-down.

15 The concept according to the invention can be implemented in a hermetic compressor, where the motor is placed in a pressurised gas atmosphere, or in a conventional, externally powered rotating machine. In the latter case, a designated shaft or axle seal 8 must then be used to seal against the atmosphere. However, such a seal may be made sub-  
20 stantially smaller than normal, as the shaft diameter shall only be dimensioned for transfer of necessary torque. The benefit of the reduced shaft diameter is that the area of use of high-pressure compressors is extended as a consequence of the fact that smaller seals withstand greater pressure. Expressed briefly, technical limitations on allowed seal pressure depend on seal diameter. Since when using the present invention there is no  
25 need for a separate support bearing outside the seal, the diameter can be made substantially smaller than in a conventional rotating machine.

Moreover, as shown in Fig. 4, it is possible in addition to envisage an adjustment of the geometry of the combined bearings and seals by using gas pressure differences in the  
30 rotating machine and lead the necessary bores out to a control means, for example, a regulating valve 17 which alters the pressure in a cavity between the stator and the compressor housing, or in the stator, in such manner that the pressure forces change the geometry of the bearing and seal clearance. With such a variant, it is possible to obtain a necessary degree of freedom in order to cater for different operating conditions by  
35 changing rigidity and damping in the combined bearings and seals.

As shown in Fig. 5, the damping can be further increased with the aid of the alternative configuration of the surface of the stator 18 facing the rotor 16. In this case, the bore 19 in the stator 18 has a surface structure 21 consisting of an external radial hole-pattern and a corresponding internal hole-pattern, but so positioned relative to each other that a gas exchange can take place in the direction of the greater pressure P2.

As shown schematically in Fig. 6, the motor 22 and the compressor 23 can also be located in the same housing 24. This means that external sealing is advantageously not required.

Also, it should be noted that a passive permanent magnetic bearing, see Fig. 2, can be used to support the rotor. This will reduce the load on the fluid film and increase the overall rigidity of the bearing, which is essential at start-up or shut-down. In such a case, the passive permanent magnetic bearing is arranged integrated in the bearing and seal combination or separately next to the combination.

Now, reference is made to Fig. 7A to 7D for further explanation of advantageous embodiments of the invention having alternatives to reduce gas rotation. The alternatives may be seen isolated or in combinations with one another, and in the drawings it is illustrated with reference indicators that "a" specifies one example of an axial rib, "b" specifies one example of axial brush, "c" specifies one example of inclined hole-pattern, and "d" specifies one example of a guide apparatus, where the latter may be guide blades. Even if Fig. 7B to 7D all show such a guide blades, it should be understood that the guide blade may be separately used or in combination with one or more of the other variants. Otherwise, it shall particularly be noted that the variant according to Fig. 7A illustrates that in addition to the axial ribs it is arranged a separate honeycomb structure 25, which may possibly used along with the other mentioned above. The examples above and their respective uses will be explained below. In actual uses it is utilized a distance in the clearance of approximately 0,2-0,3 mm.

Longitudinal, axial ribs mean a raised portion in the surface which is situated in the longitudinal direction of the stator.

Brushes correspond partly to the longitudinal, axial ribs mentioned above, but in stead of being of "solid wood" these are made from brushes having minimal radial threads.

Configuration of the hole-pattern is small holes in the surface situated in a pattern which is inclined to the axial direction, whereby the flow restriction of gas is directionally orientated. As an example, inclined is here meant relative to the axial direction of the stator.

5

In one variant of the invention the stator is formed in a manner that the gas rotation in the clearance providing for sealing and bearing is minimal, to achieve sufficiently effective damping at low frequencies. For instance, this may be achieved having longitudinal, axial ribs, brushes or by forming a hole-pattern, whereby the gas slows more easily to the rotating direction of the shaft. Similarly, one or more segmented annuluses may be situated in the stator, with or without injection/extraction of gas to achieve the same effect.

Gas from an accumulator can be injected, for instance, into one or more apertures in a lower half of the bearing and sealing rings. The dimension of the apertures is advantageously adapted to the geometry of the clearance and the weight of the rotor according to a hydrostatic bearing principle.

By one configuration it is confirmed that for some applications, prior art a pattern to achieve roughness in the stator, such as hole-pattern, honeycomb structure, etc., will not provide for sufficiently effective damping at low excitation frequencies. In such cases, it is found advantageously to alter the roughness pattern, whereby they are formed having longitudinal ribs or brushes and the like to reduce the rotation of the gas film and thereby the cross coupling stiffness of the gas film.

25

In addition or as an alternative to the latter, the pattern in the stator can be formed in a manner that the flow resistance is higher in the direction of the rotating direction, e.g. at an inclined hole-pattern. Thereby, the rotation of the gas will be reduced relatively to the prior art.

30

As a further addition or alternative, it may be arranged a guide apparatus at the inlet to the stator 18 of the bearing and sealing unit, which gives the gas a start rotation in a direction opposite the rotating direction of the rotor 16.

35 These embodiments involve that the stator is formed in a manner that the gas rotation within the sealing and bearing clearance is minimal, to achieve sufficiently effective damping at low frequencies. As mentioned above, this may be achieved generally and



as examples having longitudinal ribs, brushes or by forming a hole-pattern, whereby the gas flows more easily to the rotating direction. Similarly, one or more segmented annuluses may be situated in the stator, with or without injection/extraction of gas to achieve the same effect.

5

As to achieve benefit at all driving phases, the invention is adapted in a manner that gas from the accumulator can be injected into one or more apertures in the lower half of the bearing and sealing rings. The dimension of the apertures is then advantageously adapted to the geometry of the clearance and the weight of the rotor according to a hydrostatic bearing principle.

10

P a t e n t   c l a i m s

1.

A bearing system for a rotor in rotating machines, such as compressors, pumps, turbines  
5 and expanders, the rotor being provided with at least two bearings and associated seals,  
c h a r a c t e r i s e d   i n   t h a t   each bearing and sealing point for the  
rotor (16) is in the form of a bearing and seal combination (17) which is formed of a  
stator (18) located within a rotating machine housing (15) and surrounding the rotor  
10 (16), that the stator (18) is formed with a bore (19), whereby an annular clearance is  
formed between the stator and rotor, and that the bore (19) has a gradually increasing  
sectional area in the direction of higher pressure (P2) within the rotating machine.

2.

A bearing system according to claim 1,   c h a r a c t e r i s e d   i n  
15 t h a t   the bearing and seal combination (17) is an axial bearing formed as a cylin-  
drical disc on the rotor (16) which bears against an associated portion of the stator (18),  
whereby a gas film may be formed with rigidity and damping according to the same  
principle as in a radial bearing having desired dynamic rigidity and damping.

20 3.

A bearing system according to claim 1,   c h a r a c t e r i s e d   i n  
t h a t   the axial bearing is formed according to the hydrostatic principle which en-  
tails a flow restriction before and after its bearing surface as to obtain rigidity with ac-  
companying damping.

25

4.

A bearing system according to claim 2 or 3,   c h a r a c t e r i s e d   i n  
t h a t   the axial bearing is formed as a combination of the radial bearing with gas  
film and the hydrostatic principle with flow restriction before and after the bearing sur-  
30 face.

5.

A bearing system according to any one of the preceding claims,   c h a r a c -  
t e r i s e d   i n   t h a t   the stator (18) is provided with means (a, b, c, d)  
35 adapted for damping of gas rotation in the annular clearance.

6.

A bearing system according to claim 5, characterised in that the rotating damping means are respectively in the form of an axial rib(a), a brush (b), an inclined hole-pattern, and a guide apparatus (d), such as guide blades.

5

7.

A bearing system according to any one of the preceding claims, characterised in that the bore (19) is formed having an uneven surface structure.

10

8.

A bearing system according to any one of the preceding claims, characterised in that the bore (19) is formed having a honeycomb structure or pattern of holes (20).

15

9.

A bearing system according to any one of the preceding claims, characterised in that the surface structure (21) of the bore (19) has an outer zone consisting of an external radial pattern of holes and an internal pattern of channels, but so positioned relative to each other as to allow gas exchange to take place in the direction of the higher pressure (P2).

20

10.

A bearing system according to any one of the preceding claims, characterised in that at the start-up or the run-down of the rotating machine the higher pressure (P2) is provided by means of an accumulator (6) which contains gas at such a pressure, and which is in communication with each individual bearing and seal combination (17).

30

11.

A bearing system according to any one of the preceding claims, characterised in that the system comprises at least two support bearings (7) arranged in connection with the respective bearing and seal combination (17), and which are of a type suitable for withstanding contact for a brief period during start-up or run-down.

35

12.

A bearing system according to any one of the preceding claims, c h a r a c -  
t e r i s e d i n t h a t the system comprises a control means (7) such as a  
regulating valve, so as to adjust the geometry of the respective bearing and seal combi-  
5 nation (17) by means of applied pressure forces.


13:

A bearing system according to any one of the preceding claims, c h a r a c -  
t e r i s e d i n t h a t the motor (22) and the compressor (23) are located in  
10 the same housing (24).


14.

A bearing system according to any one of the preceding claims, c h a r a c -  
t e r i s e d i n t h a t a passive permanent magnetic bearing for support of  
15 the rotor (16) at start-up or shut-down is arranged integrated in the bearing and seal  
combination (17) or separately adjacent thereto.

1/10

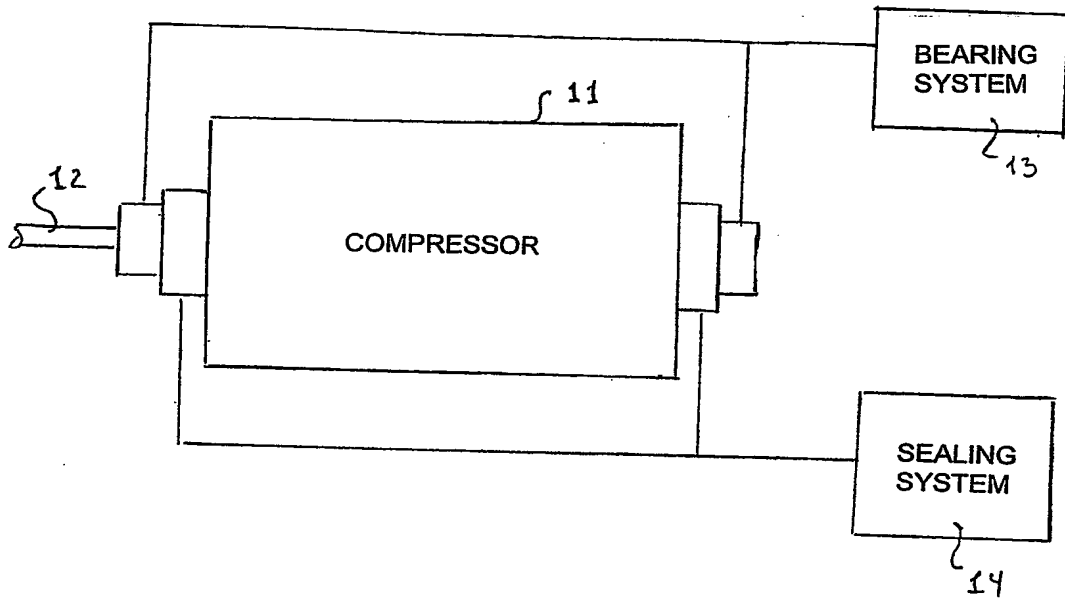


1A: Traditional

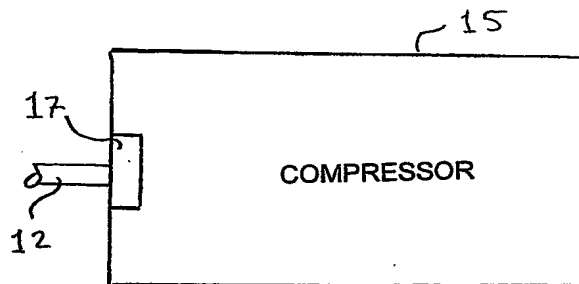

1B: Proposed technology

Fig. 1

2/10

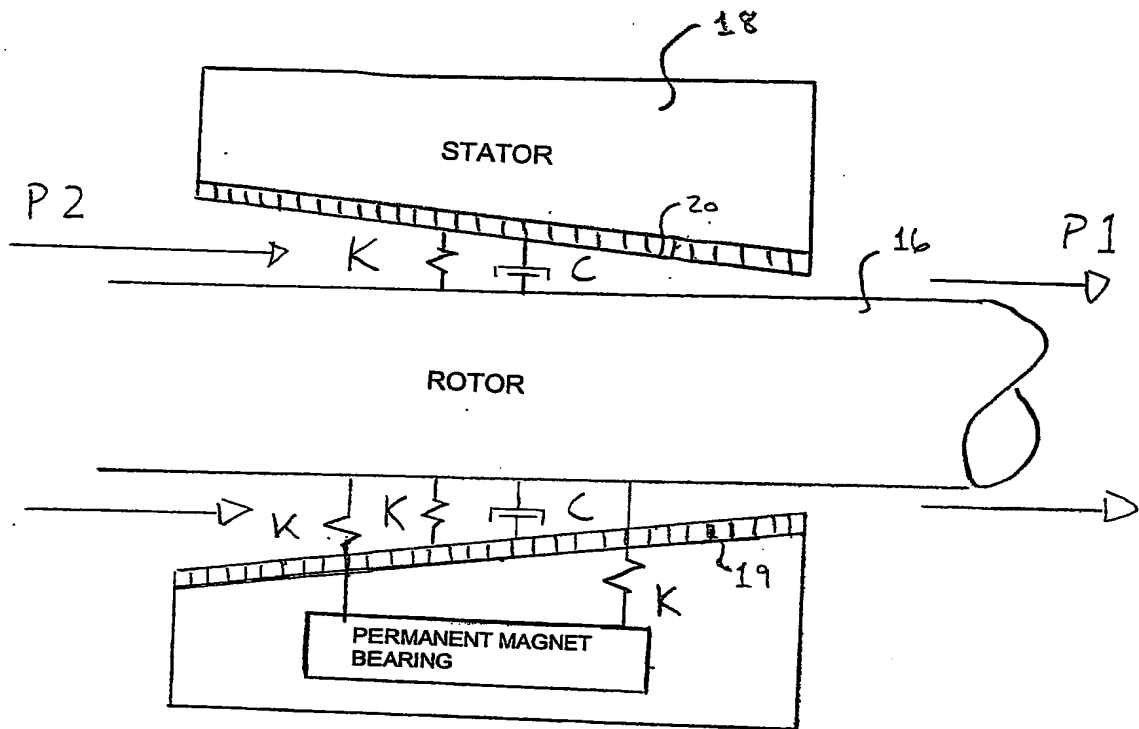


$$P_2 > P_1$$

K: positive direct rigidity

C: positive direct damping

Fig. 2

3/10

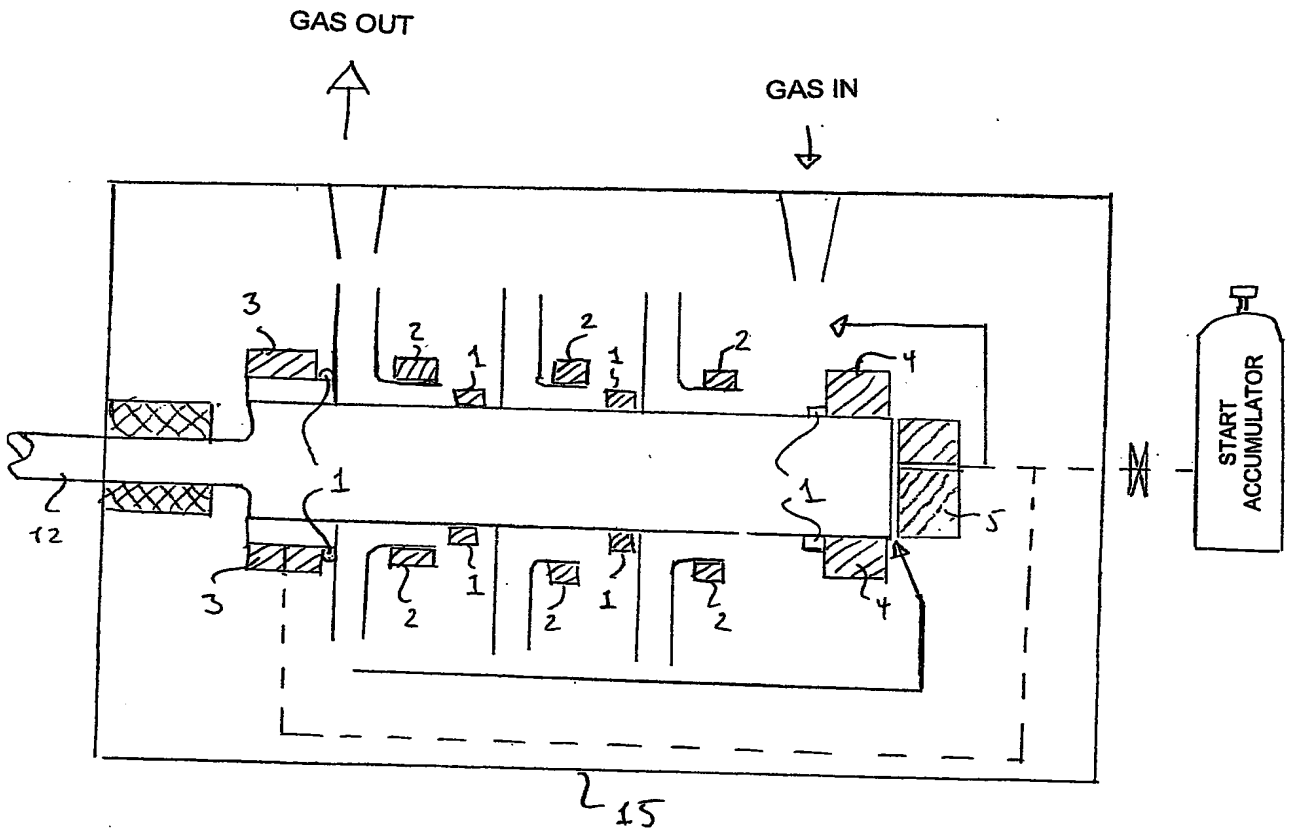

 : BEARING/SEALING

 : AXLE SEALING AGAINST ATMOSPHERE

Fig. 3

4/10

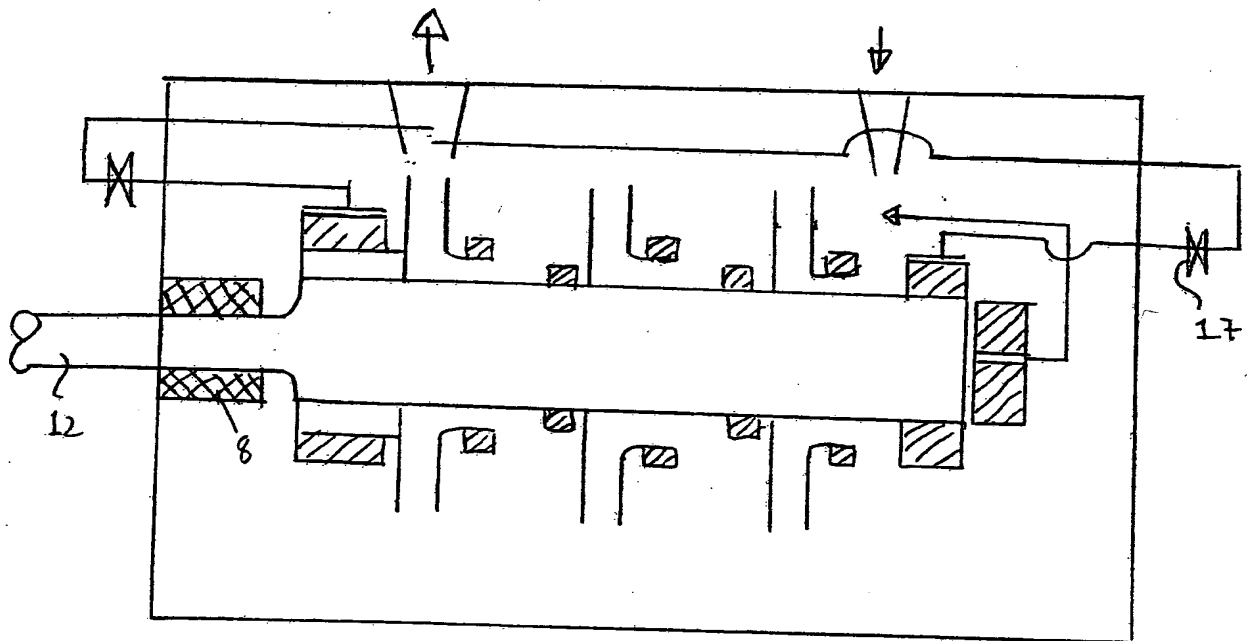


Fig. 4



5/10

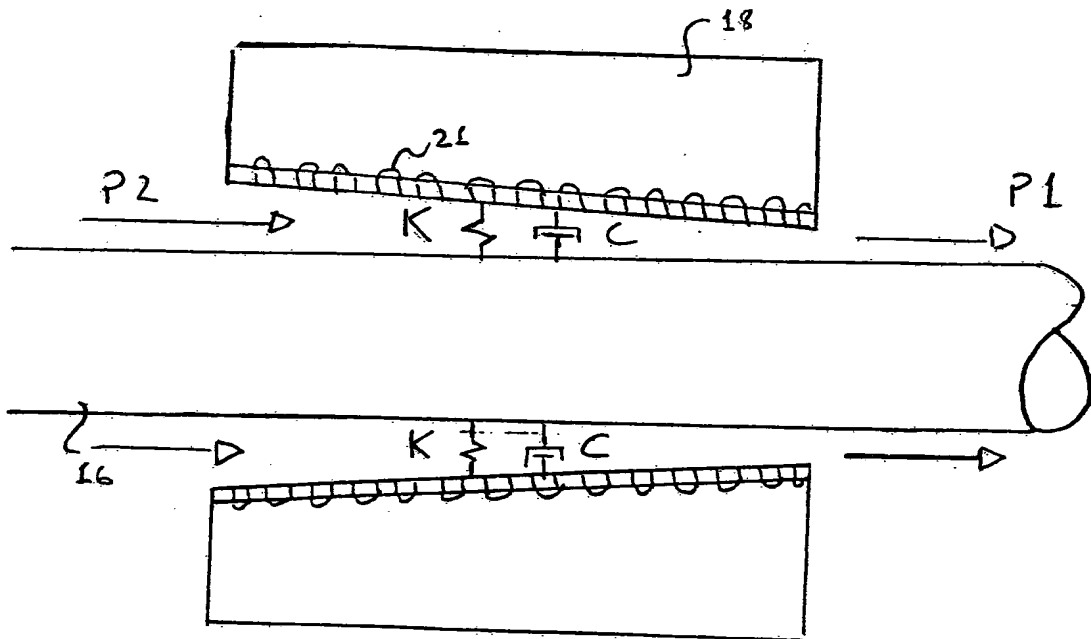


Fig. 5

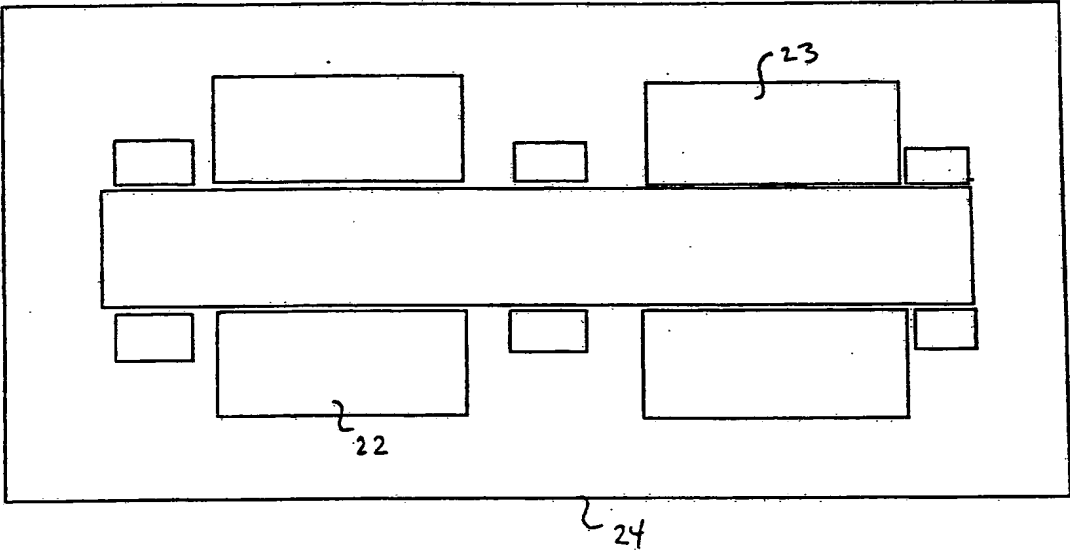


Fig. 6

7/10

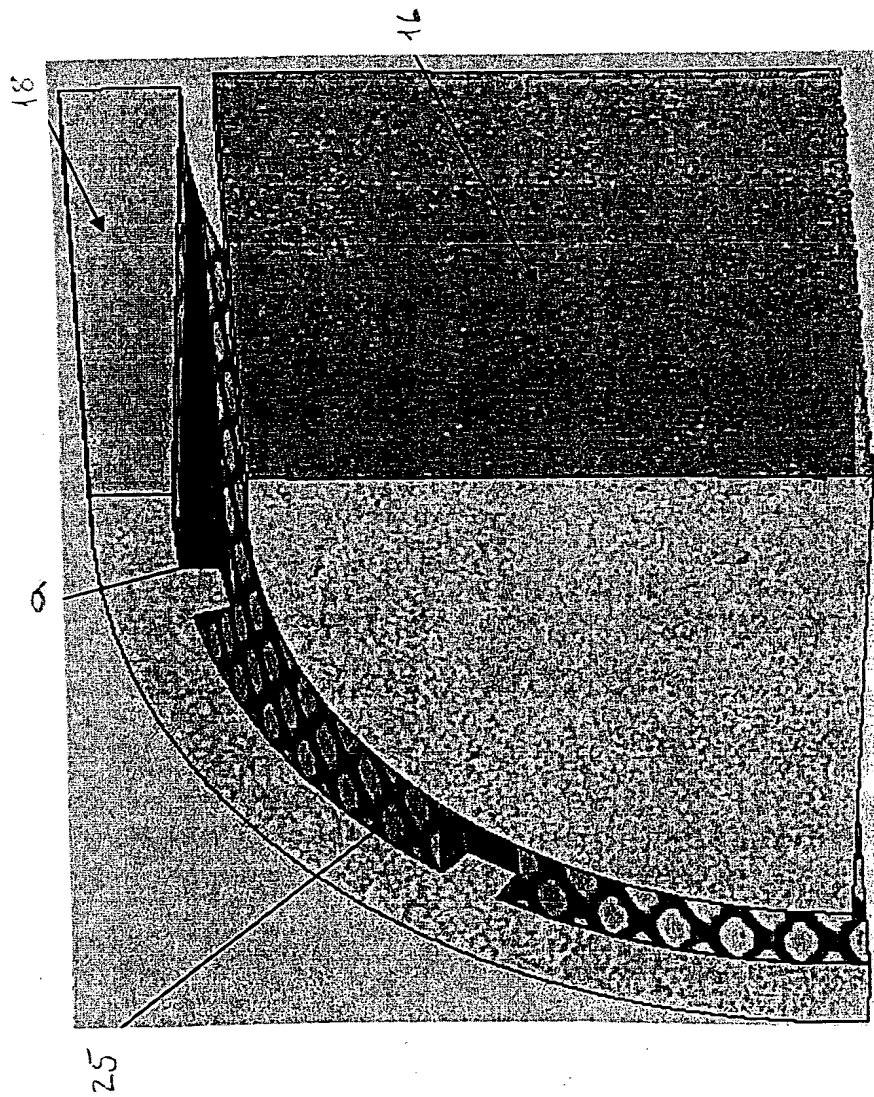


Fig. 7A

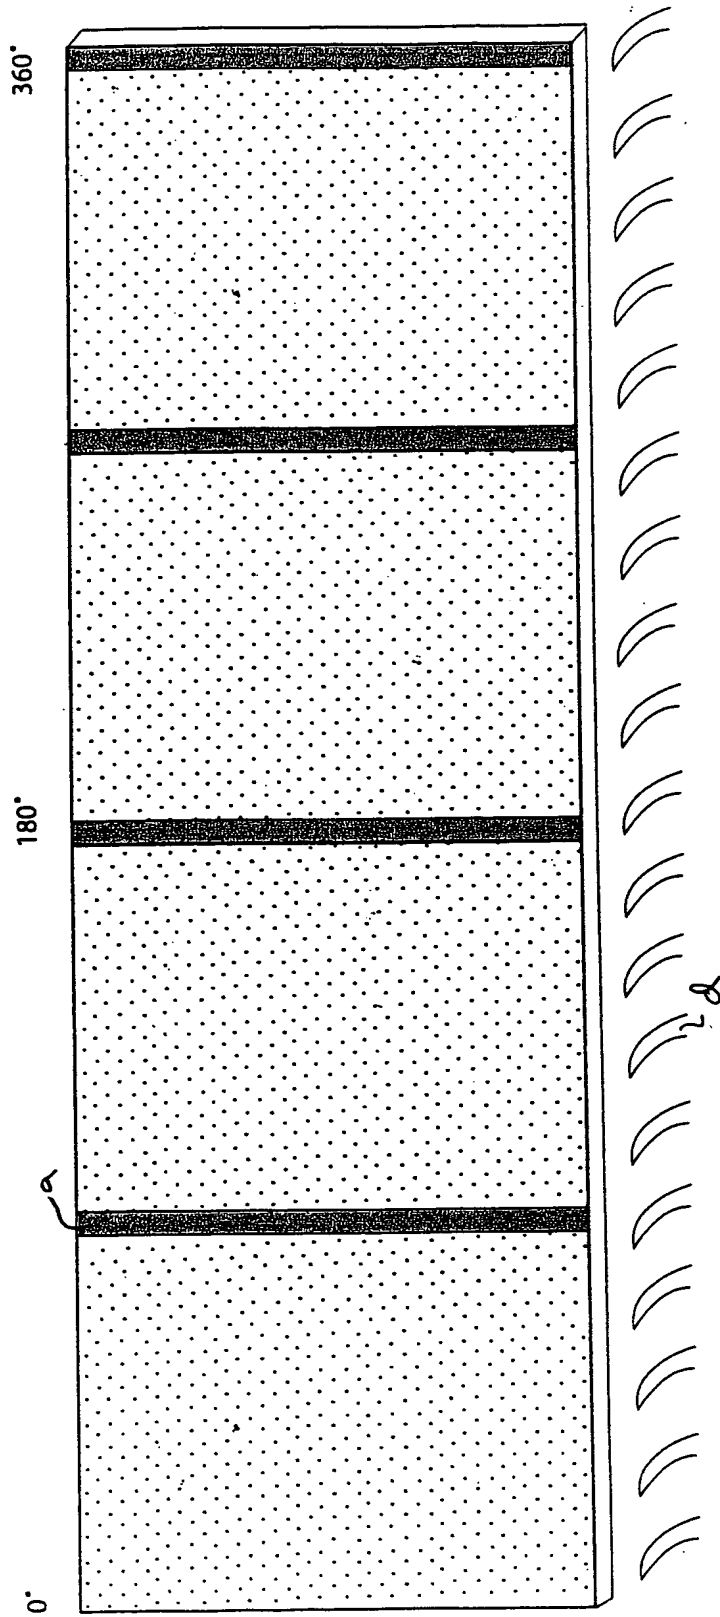


Fig. 7B

9/10

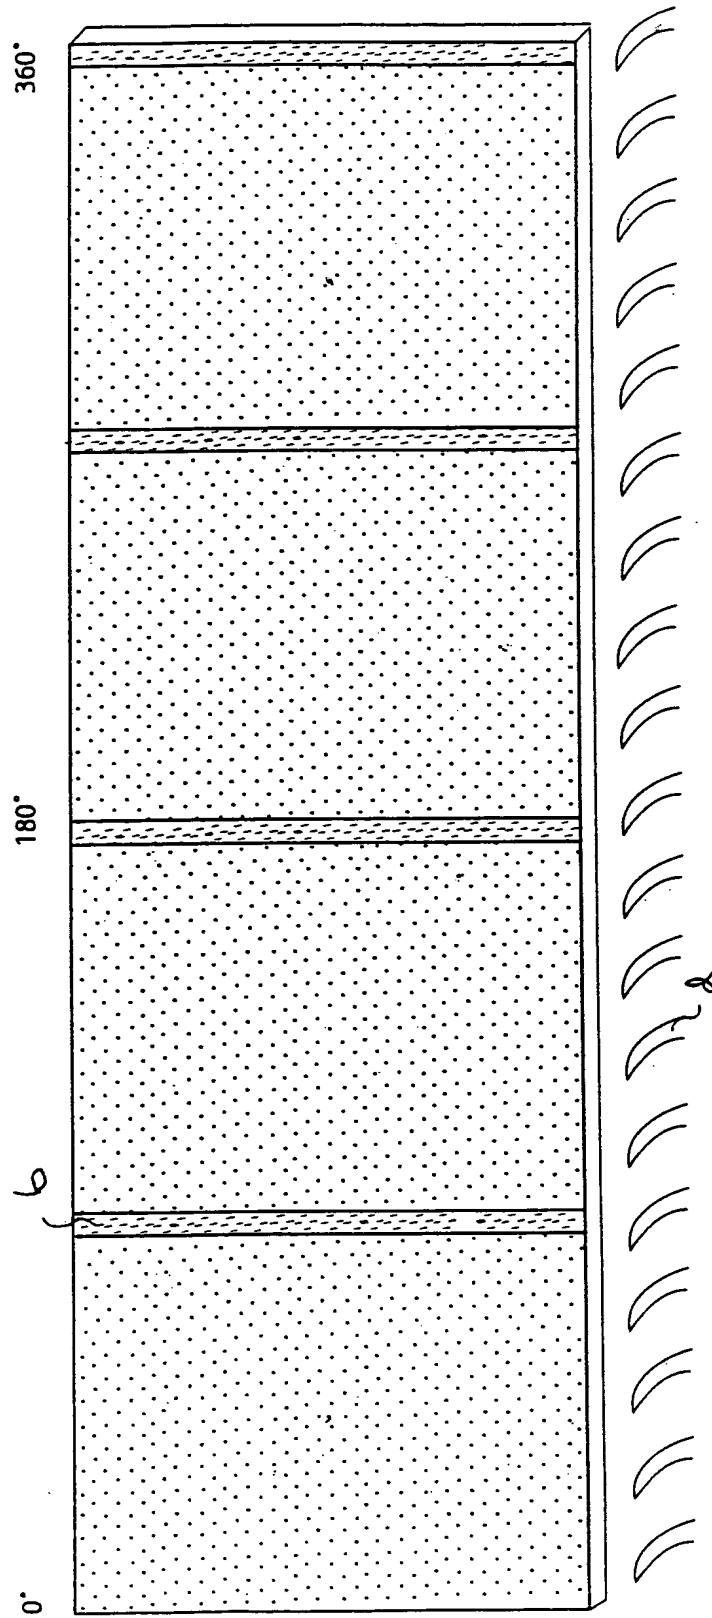


Fig. 7C

10/10

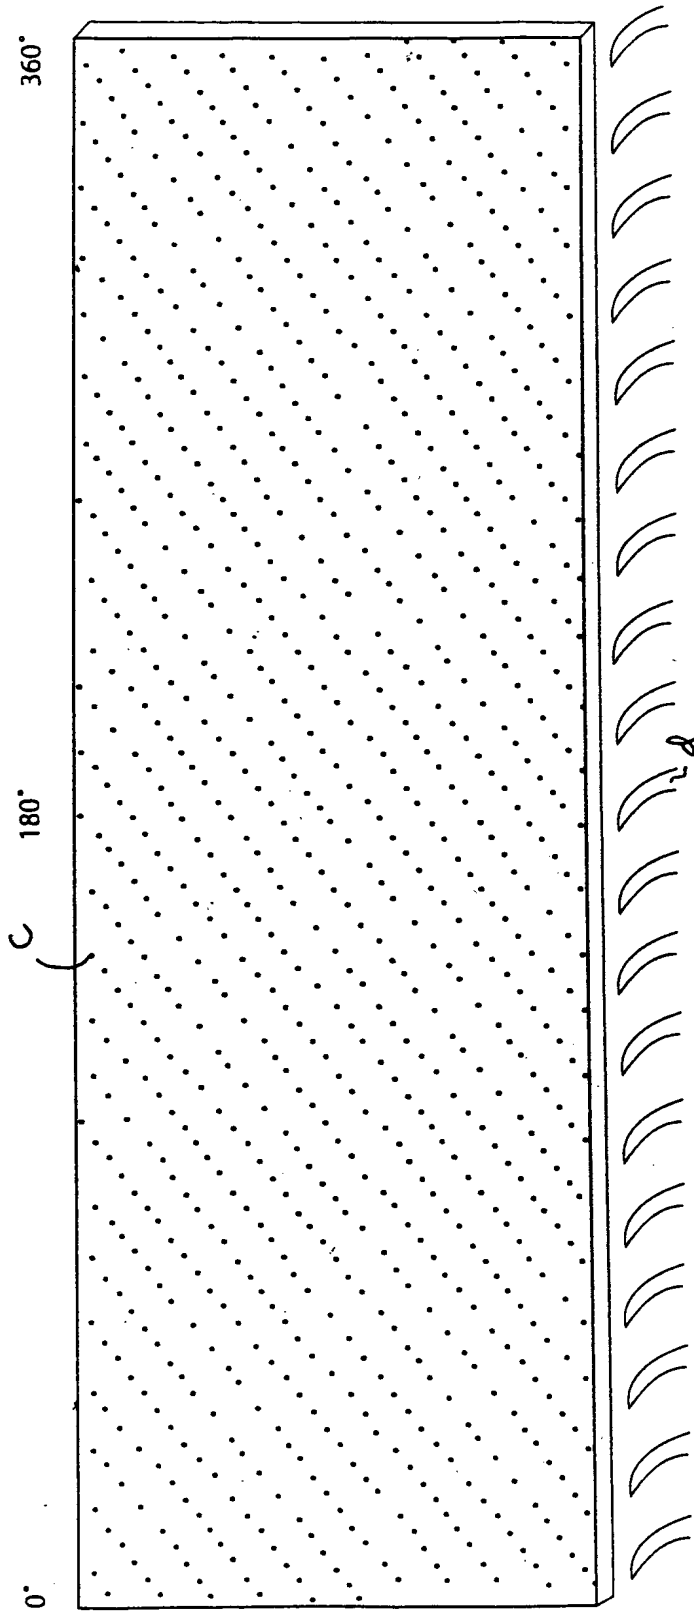


Fig. 7D

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2009/000034

## A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F16C, F04C, F04D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5310265 A (STANGELAND ET AL), 10 May 1994 (10.05.1994), column 2, line 27 - line 51; column 3, line 15 - line 42, figures 4-6, abstract --	1-14
P,X	WO 2008018800 A1 (STATOIL ASA), 14 February 2008 (14.02.2008), figures 1-6, abstract --	1-14
A	EP 1607633 A1 (OHMI, TADAHIRO), 21 December 2005 (21.12.2005), figure 7, abstract, paragraph (0027) --	1-14

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 April 2009

Date of mailing of the international search report

23 -04- 2009

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Jan-Axel Ylivainio / JA A  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2009/000034

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1619355 A1 (SIEMENS AKTIENGESELLSCHAFT), 25 January 2006 (25.01.2006), figures 1-4, abstract  -----	1-14



**International patent classification (IPC)***F16C 32/06* (2006.01)*F04D 29/04* (2006.01)**Download your patent documents at [www.prv.se](http://www.prv.se)**

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at [www.prv.se](http://www.prv.se) (English version)
- From "Anförda dokument" found under "e-tjänster" at [www.prv.se](http://www.prv.se) (Swedish version)

Use the application number as username. The password is **AEYQRHPBT**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/NO2009/000034

US	5310265	A	10/05/1994	NONE		
WO	2008018800	A1	14/02/2008	NO	20063588 A	11/02/2008
EP	1607633	A1	21/12/2005	JP	2004263627 A	24/09/2004
				US	20060188383 A	24/08/2006
				WO	2004079197 A	16/09/2004
EP	1619355	A1	25/01/2006	WO	2006008235 A	26/01/2006